
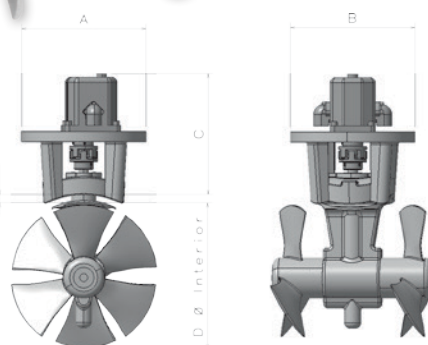


CT 225 HYD

Specifications

Code	317591
Model	CT 225 HYD
Max Thrust (kgf/lbs)	220 / 44 1
Hydraulic Power (k/w)	13,5
Propellers	Duo
Weight (kg)	19
A (mm)	220
B (mm)	220
C (mm)	220
D (mm)	250
E (mm)	7 to 8

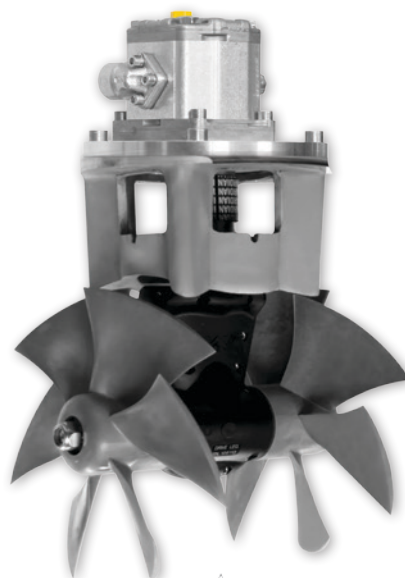

Boat Type	Boat Length (feet/meter)
Heavy Displacement High Windage & Cruising	45' - 58' / 13,7 - 17,6 m
Medium Displacement Medium Windage & Fast Cruising	53' - 69' / 16 - 21 m
Light Displacement Light Windage & Super Fast Cruising	60' - 75' / 18 - 22,8 m

The twin propeller CT HYD 225 is manufactured using composite materials, has a 250 mm diameter tunnel, a thrust rating of up to 200/44 1 (kg/lbs) and integrates all the unique features of the range.

Unique Features:



Composite drive legs



Line shields



Zero maintenance



Case hardened spiro-conical gears



Branded hydraulic components



Water resistant



Unrivaled safety features

Control Panels:

Max Power's thruster control systems include a variety of advanced safety features.

- Childproof activation
- Automatic shutdown after 30 minutes of inactivity
- Visible and audible overheat warning
- Time delay switch between port and starboard thrust
- Software protection against short circuits

