



Coolwater Strainer FTR330M

THIS PRODUCT CONTAINS A FTR330 HOUSING IN A UPGRADED MATERIAL (NAVIDURIN®) WHICH HAS BETTER MECHANICAL PROPERTIES. IN COMBINATION WITH A NEW DESIGN LID IT CAN BE USED BELOW THE WATERLINE.

- NAVIDURIN® MATERIAL
- MAX. PRESSURE: 5,5BAR (80PSI)
- EASY INSPECTION WITHOUT DISMANTELING
- EASILY REMOVABLE COVER
- ROBUST AND DURABLE FILTER







Overall Dimensions

FTR330M

FTR330M

Coolwater Strainer FTR330M

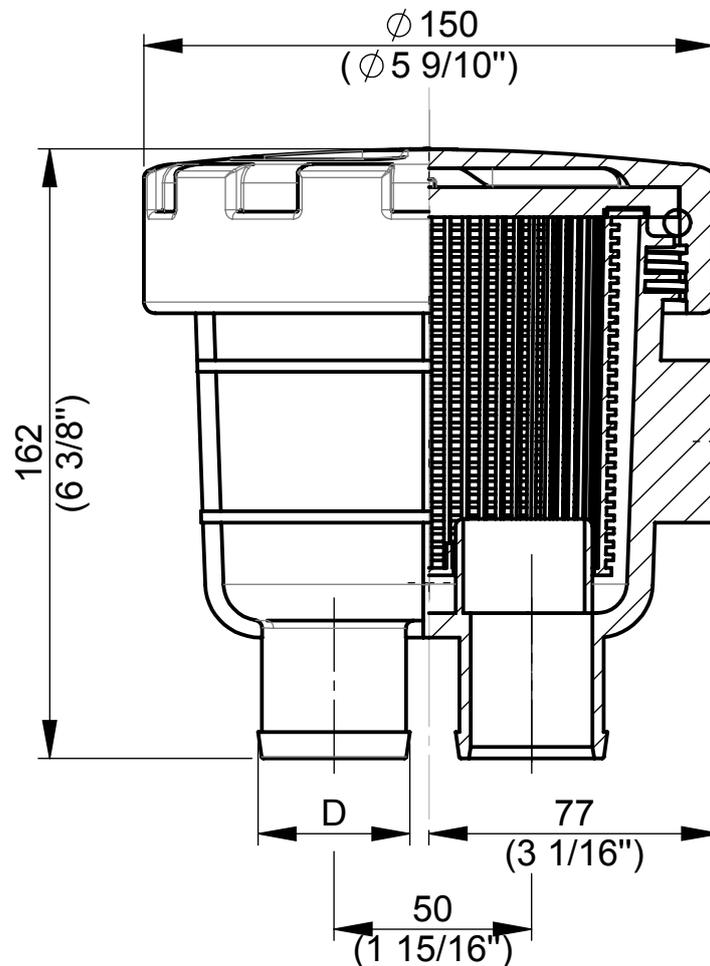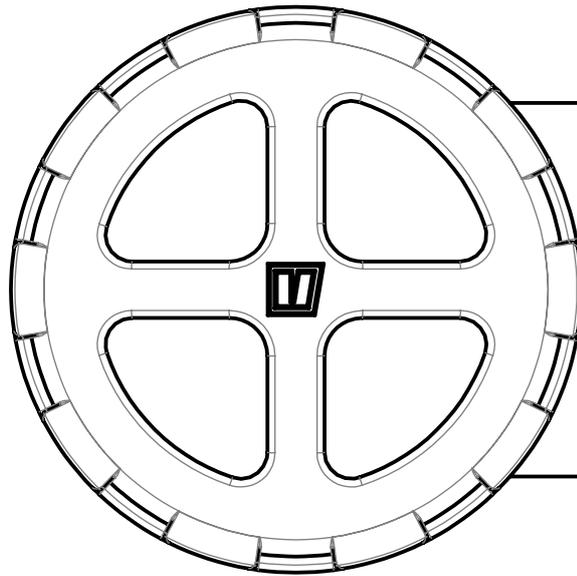

SECTION A-A
SCALE 1 : 2

Technical data: mm (inch)	FTR330M /13	FTR330M /16	FTR330M /19	FTR330M /25	FTR330M /32	FTR330M /38
(D)Internal Ø hose mm (inches)	12,7 (1/2")	15,9 (5/8")	19,1 (3/4")	25,4 (1 1/2")	31,8 (1 1/4")	38,1 (1 1/2")
Recommended input l/min (GMP US)	23 (6)	35 (9)	51 (13)	91 (24)	143 (38)	200 (53)